



PCT/GB 2003 / 0 0 1 3 8 7



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

BEST AVAILABLE COPY



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed  *He Behen*

Dated 4 April 2003

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

THE PATENT OFFICE

A

19 APR 2002

NEWPORT

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

19 APR 2002

1. Your reference XA1599
2. Patent application number 0208963.9  
(The Patent Office will fill in this part)
3. Full name, address and postcode of the or of each applicant (underline all surnames)  
  
Patents ADP number (if you know it)  
  
If the applicant is a corporate body, give the country/state of its incorporation  

BAE SYSTEMS plc  
6 Carlton Gardens  
London  
SW1Y 5AD  
  
07914674004  
United Kingdom
4. Title of the invention LANDING GEAR DOOR ASSEMBLY
5. Name of your agent (if you have one)  
  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
  
Patents ADP number (if you know it)  

BAE SYSTEMS plc  
Group IP Department  
Lancaster House, P.O. Box 87  
Farnborough Aerospace Centre  
Farnborough, Hampshire, GU14 6YU  
  
07914674002
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number  

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	--	-------------------------------------
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application  

Number of earlier application	Date of filing (day / month / year)
-------------------------------	-------------------------------------
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))  

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	14	✓
Claim(s)	03	✓
Abstract	01	✓
Drawing(s)	10	+ 10

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Malcolm EDIS

Date

17/04/2002

12. Name and daytime telephone number of person to contact in the United Kingdom Maria Burkes 01252 383487

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

- 1 -

Landing gear door assembly

The present invention relates to an aircraft landing gear door assembly.

A landing gear of an aircraft is typically movable between a deployed position,  
5 where the landing gear extends downwardly from the aircraft and wheels of the  
landing gear can engage a runway, and a stored position where the landing gear is  
accommodated within appropriately shaped bays in the aircraft's fuselage or wing.  
So as not to interfere with the overall aerodynamic properties of the aircraft in flight,  
the bays are provided with doors which, when closed, conform to the shape of the  
10 aircraft body.

In a known landing gear door assembly, a pair of doors are provided. In the  
closed position of the doors the opening or aperture of the bay accommodating the  
landing gear is closed across by the doors with adjacent edges of the doors  
extending along a generally longitudinal axis spanning the aperture. Each door is  
15 hinged about a generally horizontal and longitudinal axis in the region of the edge of  
the door opposite to the edge adjoining the other door, allowing the doors to be  
rotated downwardly about the axes to open positions in which the doors extend  
approximately vertically downwardly from the aircraft body. It will be understood that  
references to the horizontal and vertical and the like, refer to a situation where the  
20 aircraft is at rest on a horizontal runway.

The size of the pair of doors depends upon the size of the aperture that the  
doors must close over and the aperture must in turn be sufficiently large to allow  
passage of the landing gear during deployment. As a result, if the landing gear is  
relatively large the doors must in turn be relatively large. Especially in the case of  
25 large aircraft, it may be desirable to have landing gears deployed in close proximity

to one another. In such a case, however, it is important that the doors associated with one landing gear do not interfere with the deployment of an adjacent landing gear. Thus the size of a door, even when fully open, may need to be limited to avoid interference with an adjacent landing gear.

5 It is an object of the invention to provide an aircraft landing gear door assembly that overcomes or mitigates the problems referred to above and in particular enables a relatively large aperture to be provided when the doors are open without the doors interfering with an adjacent landing gear.

10 According to the invention there is provided an aircraft landing gear door assembly including a plurality of doors moveable between open positions, in which landing gear can be deployed through an aperture, and closed positions, in which the doors are closed across the aperture, the plurality of doors including a first door mounted for rotational movement between closed and open positions about a first generally longitudinal axis and a transverse door mounted for rotational movement  
15 between closed and open positions about a generally horizontal axis that is transverse to the first generally longitudinal axis.

The provision of a transverse door allows the length of the first door to be reduced from that which would otherwise be required to allow passage of the landing gear. Such reduction in the length of the first door may avoid the first door interfering  
20 with the deployment of a neighbouring landing gear as well as being advantageous from an aerodynamic or noise viewpoint.

Reference is made to a "generally" longitudinal axis to signify that the axis is in a direction generally aligned with the longitudinal axis of the aircraft fuselage, rather than being transverse thereto. It is not, however, essential for the axis of  
25 rotation to be precisely aligned with the longitudinal axis of the aircraft fuselage and

indeed in particular cases it may be preferred that the axis of rotation is at an acute angle to the longitudinal axis.

Reference is made to a "transverse" door merely because the door is one mounted for rotational movement about a generally horizontal axis that is transverse to the first generally longitudinal axis. Whilst in a preferred embodiment of the invention, the longest dimension of the transverse door is in a direction transverse to the first generally longitudinal axis this need not be so; for example, it is possible for the length of the transverse door measured along the longitudinal axis to be greater than its width measured along its transverse axis of rotation.

The first door is preferably mounted for fixed-axis rotational movement about the first generally longitudinal axis. The transverse door is preferably mounted for fixed-axis rotational movement about the transverse generally horizontal axis. Whilst it is possible for a door to be mounted such that its movement is a complex combination of translational and rotational movements, fixed-axis rotation provides a simple and reliable design.

The assembly preferably further includes a linkage mechanism and a prime mover. The linkage mechanism preferably connects the plurality of doors to the prime mover such that the prime mover is effective to operate all the plurality of doors. In that way synchronized movement of the doors can be assured. The prime mover preferably comprises a linear actuator, one stroke of the actuator in one direction being effective to move the doors from the closed positions to the open positions and one stroke of the actuator in the opposite direction being effective to move the doors from the open positions to the closed positions.

Preferably the transverse door is disposed at least mostly above the aperture in its open position. It is preferred that all of the transverse door is disposed above

the aperture in its open position. By raising the transverse door as it opens, it is possible to keep the transverse door entirely within the landing gear bay and therefore avoid undesirable aerodynamic effects and/or noise. On the other hand, the first door preferably projects downwardly from the aperture in its open position.

5           The transverse door may be fore or aft of the first door but is aft of the first door in a preferred embodiment of the invention described below.

          In a particularly preferred embodiment of the invention, the plurality of doors include a second door moveable between closed and open positions, the second door being adjacent to the first door in the closed positions of the doors, the first door  
10   being so mounted that its rotational movement from its closed position to its open position involves movement of at least part of the first door through space which is occupied by the second door in its closed position and vacated by the second door in its open position. By providing a second door which when open allows the first door to move through space which would otherwise have been blocked, it becomes  
15   possible to mount the first door in a way that would not otherwise be possible. The first door can be arranged such that its outer longitudinal edge moves upwardly and outwardly as the door moves from its closed to its open position. Thus in the open position of the first door the uppermost part of the door may be raised significantly from its position when the door is closed, whereby the door projects less far  
20   downwardly in its open position than would be the case if the outer longitudinal edge of the door were hinged about a generally horizontal and longitudinal axis passing through the edge of the door. The second door is preferably mounted for fixed-axis rotational movement about a second generally longitudinal axis. The first generally longitudinal axis is preferably disposed at a location vertically spaced above the level  
25   of the opening and also preferably disposed in a region overlying the locations of

adjacent edges of the first and second doors when they are closed. By positioning the first generally longitudinal axis at a location vertically spaced above the level of the opening, the first door can readily be arranged to be raised and to enter partway into the bay as the first door is opened. The lateral movement of the first door can be accommodated by the simultaneous opening of the second door.

In a conventional door assembly it is common for a pair of doors to be provided. According to the present invention, the plurality of doors preferably includes a third door mounted for rotational movement between closed and open positions about a third generally longitudinal axis which is preferably a fixed axis, the first and third doors defining a pair of doors on opposite sides of the aperture. The plurality of doors preferably further includes a fourth door moveable between closed and open positions, the fourth door being adjacent to the third door in the closed positions of the doors, the third door being so mounted that its rotational movement from its closed position to its open position involves movement of at least part of the first door through space which is occupied by the fourth door in its closed position and vacated by the fourth door in its open position. The third door is preferably mounted for fixed-axis rotational movement about a third generally longitudinal axis, which is preferably disposed at a location vertically spaced above the level of the aperture and, preferably, in a region overlying the locations of adjacent edges of the third and fourth doors when they are closed. The fourth door is preferably mounted for fixed-axis rotational movement about a fourth generally longitudinal axis. Whilst reference is made to third and fourth doors, it should be understood that it is within the scope of the invention to provide a door assembly including the third door or both the third and fourth doors without these being the door referred to herein as the second door.



The invention also provides an aircraft including a landing gear door assembly as described herein. The aircraft may include a further landing gear which when deployed is adjacent to one end of the first door when in its open position, the transverse door being disposed adjacent to said one end of the first door when the doors are in their closed positions. In such a case, if the transverse door were instead part of the first door, the first door would interfere with the adjacent landing gear when that gear was deployed and the first door was in its open position. The provision of the separate transverse door avoids such interference.

By way of example, a landing gear door assembly embodying the invention will now be described with reference to the accompanying drawings, of which:

Fig. 1A is a rear view of the landing gear door assembly in a closed position;

Fig. 1B is a plan view of the landing gear door assembly in the closed position;

Fig. 1C is a side view of the landing gear door assembly in the closed position;

Fig. 1D is a perspective view from above and to the side and rear of the landing gear door assembly in the closed position;

Fig. 1E is a diagrammatic plan view of the door assembly, showing the assembly in a closed position;

Fig. 2A is a rear view of the landing gear door assembly, similar to Fig. 1A but showing the assembly in an open position;

Fig. 2B is a plan view of the landing gear door assembly, similar to Fig. 1B but showing the assembly in an open position;

Fig. 2C is a side view of the landing gear door assembly, similar to Fig.

1C but showing the assembly in an open position;

Fig. 2D is a perspective view from above and to the side and rear of the landing gear door assembly, similar to Fig. 1D but showing the assembly in an open position;

5 Fig. 3A is a side view of the landing gear door assembly in an open position, also showing the position of a pair of wheels of neighbouring landing gear;

10 Fig. 3B is a partly sectional rear view of the landing gear door assembly in an open position, also showing the position of a pair of wheels of neighbouring landing gear and showing part of the aircraft structure;

Fig. 4 is an enlarged perspective view of part of the door assembly as shown in Fig. 1D; and

15 Fig. 5 is a diagrammatic plan view of a modified form of the door assembly, showing the assembly in a closed position.

20 The doors of the door assembly of the embodiment described herein are movable between an open position, wherein a single landing gear may pass out of or into the relevant landing gear bay of the aircraft and a closed position, wherein the landing gear is stored in the bay and the doors conform to the shape of the surrounding part of the aircraft.

25 The structure and operation of the door assembly will be described by referring firstly to the doors, the axes about which they are arranged to rotate and the positions that they occupy in the open and closed positions. Thereafter the mountings and linkages that achieve the desired movements will be described.

The door assembly shown includes three doors: a first door 1, a second door 2, and a door 3. The first door 1 is mounted for rotation about a first longitudinal axis 11. The second door 2 is mounted for rotation about a second longitudinal axis 12, parallel to the axis 11. The door 3, referred to herein, as a transverse door, is mounted for rotation about an axis 13 that is substantially horizontal and substantially perpendicular to the longitudinal axes 11 and 12.

Each door is mounted with only one degree of freedom, namely rotation about a fixed axis. Each of the doors is, however, rotatable about an axis spaced from any part of the door and therefore rotation of each door about its respective axis of rotation as it moves between its open and closed positions causes both a change in the orientation of the door and a displacement of the door as will now be further described. The configuration of the three doors 1, 2, 3, when closed, is shown schematically in Fig. 1E.

Referring to Figs. 1A to 1E, and especially to Fig. 1B, it may be seen that the first door 1 is bounded by longitudinal side edges 21a and 21b, a curved fore edge 21c and a straight aft edge 21d. The second door 2 is of similar length to the first door 1 and is bounded by longitudinal side edges 22a and 22b and fore and aft edges 22c and 22d. The side edge 21b of the first door 1 lies immediately adjacent to, and is of similar length to, the side edge 22a of the second door 2 when the doors are closed. The transverse door 3 is of much shorter length than the doors 1 and 2 and of very approximately semi-circular shape. The transverse door 3 is defined by a straight fore edge 23c, immediately adjacent to and of similar length to the aft edge 21d of the first door, and a curved edge 23d of very approximately semi-circular shape. As can be seen in Fig. 1B the doors 1 and 3 when closed together define an approximately oval shape with the door 2 providing an extension to that shape on

one side. It will be understood that in their closed positions shown in Figs. 1A to 1E, the three doors 1, 2, 3 fill the aperture (or as explained below one half of the aperture) through which landing gear is to be deployed and the shape of that aperture in the described embodiment is therefore the shape defined by the outer edges of the doors 1, 2 and 3 in Figs. 1A to 1E.

The movement of the doors 1, 2 and 3 from their closed positions to their open positions is effected by one linkage connected to all three doors so that their movement is simultaneous. In the description below, the movement of each door is described in turn in the interests of clarity.

As can be seen in Fig. 1A, the fixed axis of rotation 11 of the first door 1 is spaced a distance above the door and at a position directly overlying the edge 21b of the first door. As can be seen by comparing the orientation of the door 1 in Figs. 1A and 2A, the door rotates through an angle of about 75 degrees when moving from its closed to its open position. Consequently the edge 21b of the first door 1 moves to the right (as seen in Fig. 1A) as the door begins to open and also moves upwardly especially towards the end of its path of movement. Thus in the open position of the door 1, the top edge 21b of the door is above its closed position and to the right (as seen in Fig. 1A) of its closed position.

The fixed axis of rotation 12 of the second door 2 is slightly above and to the right (as seen in Fig. 1A) of the edge 22b of the second door. As can again be seen by comparing the orientation of the door in Figs. 1A and 2A, the door rotates through an angle of about 75 degrees when moving from its closed position to its open position. The second door 2 therefore moves to the right as it opens with only slight upward movement of the top edge 22b of the door.

It should also be observed that, if the second door 2 were to remain in its

closed position, it would be impossible for the first door 1 to move from its closed position to its open position because such movement involves passing through the space occupied by the second door 2 when in its closed position. As already indicated, however, the second door 2 opens in synchronism with the first door 1 and  
5 at no stage blocks the opening of the first door 1.

The fixed axis of rotation 13 of the transverse door 3 is above that of the fixed axis 12, as can be seen in Fig. 1A and is slightly to the inside of the straight edge 23c of the door. As can be seen by comparing the orientation of the door 3 in Fig. 1C and Fig. 2C, the door rotates through an angle of a little over 80 degrees when  
10 moving from its closed position to its open position. The transverse door 3 therefore moves upwardly and longitudinally away from the first and second doors as it opens and, in its fully open position, all of the transverse door is above the fixed axis of rotation 12 of the second door 2. Thus in its open position all of the transverse door is housed within the landing gear bay that is closed by the three doors 1, 2, 3 in their  
15 closed positions. Thus the existence of the transverse door has very little aerodynamic effect on the aircraft.

By providing such a transverse door the length of door extending downwardly from the aircraft when the doors are in their open position can be reduced and that may enable a neighbouring landing gear to be located closer to the described door  
20 assembly than would otherwise be the case. Figs. 3A and 3B illustrate this benefit schematically: wheels 25 of a neighbouring landing gear are shown. In Fig. 3B a skin structure 26 of an aircraft fuselage extending around the landing gear bay is shown as well as the outline of an internal fixed structure 27 within the fuselage. It can be seen from Fig. 3A that one of the wheels 25 is immediately adjacent to the  
25 edge 21d of the first door 1 when that door is in its open position. If the transverse

door 3 were simply a part of the first door 1 that moved with the first door, then the door would interfere with the wheel 25. If the transverse door 3 were simply a fixed part of the aircraft structure then the length of the opening provided by the door assembly would be reduced, which would adversely affect deployment of the landing gear. By providing the transverse door, the opening can be lengthened without causing obstruction of the door assembly, when open, to neighbouring landing gear.

Having now described the doors, the axes about which they rotate and the positions that they adopt in their open and closed positions, the details concerning the mounting of the doors will be described.

The door 1 has three arms 31, 32 and 33 fixed to the inside face of the door at equispaced intervals along and adjacent to the side edge 21b of the door 1. The central arm 32 is formed of two angled portions 34, 35, the portion 34 being fixed to the door at its remote end and the portion 35 being rotatably connected at a connection 36 at its remote end to the distal end of a fixed mounting 37 which is fixed to the aircraft structure 27 (see Fig. 3B) inside the landing gear bay. Where the angled portions 34, 35 of each arm meet they are fixedly joined to the middle of a rod 38 which extends parallel to the side edge 21b of the door 1. The arms 31 and 33 are each fixed at one end to the door 1 and at the other end to the rod 38. The opposite ends of the rod 38 are fixedly joined to ends of respective links 39a and 39b, whose opposite ends are rotatably connected at connections 40 to the distal ends of respective fixed mountings 41 which are fixed to the aircraft structure 27 (see Fig. 3B) inside the landing gear bay. The rotatable connections 36 and 40 all lie on the axis of rotation 11 of the door 1 and thus the door 1 is mounted for rotation about the axis 11.

The door 2 has three arms 43, 44, 45 fixed to the inside of the door at

equispaced intervals along and adjacent to the side edge 22b of the door 2. Each of the arms 43, 44, 45 is rotatably mounted at a respective connection 46, provided at its end remote from the door 2, to the distal end of a respective fixed mounting (not shown) fixed to the aircraft structure inside the landing gear bay. The rotatable  
5 connections 46 all lie on the axis of rotation 12 of the door 2 and thus the door 2 is mounted for rotation about the axis 12.

The door 3 has two arms 48, 49 fixed to the inside of the door adjacent to the straight edge 23c of the door. The arm 48 is rotatably connected at a connection 50 provided at its end remote from the door 3 to the distal end of a rod-shaped fixed  
10 mounting 51 which is fixed (see Fig. 3B) to the aircraft structure 26 inside the landing gear bay. The arm 49 is rotatably connected at a connection 52 provided at its end remote from the door 3 to the distal end of a fixed mounting 53 which is fixed to the aircraft structure 27 (see Fig. 3B) inside the landing gear bay. The rotatable connections 50 and 52 both lie on the axis of rotation 13 of the door 3 and thus the  
15 door 3 is mounted for rotation about the axis 13.

A linkage mechanism links the movement of the doors so as to synchronize the movements, as will now be described.

Firstly there is a linkage that synchronizes the movement of the second door 2 to the movement of the first door 1. That linkage comprises a first crank arm 54, a  
20 link rod 55 and a second crank arm 56. The first crank arm 54 is fixedly joined at one end to the link 39a at its connection 40 on the axis of rotation 11 of the door 1. The other end of the first crank arm 54 is rotatably connected to one end of the link rod 55. The second crank arm 56 is fixedly joined at one end to the arm 43 at its connection 46 on the axis of rotation 12 of the door 2. The other end of the second  
25 crank arm 56 is rotatably connected to the other end of the link rod 55. Thus,

rotational movement of the first door 1 causes rotation of the first crank arm 54 which in turn, via the link rod 55, causes rotation of the second crank arm 56 and, with it, the second door 2. The amount of angular movement of the door 2 for a given angular movement of the door 1 is determined by the geometry of the linkage and especially the relative lengths of the cranks of the crank arms 54 and 56.

Secondly there is a linkage that synchronizes movement of the door 3 to the movement of the door 1. Referring now especially to Fig. 4, that linkage comprises a crank arm 58, a link rod 63 and a shaft 64. The crank arm 58 is fixedly joined via an end portion 59 to the link 39a at its connection 40 on the axis of rotation of the door 1 and, as can be seen in Fig. 4, is an extension of the crank arm 54. The crank arm 58, has a portion 60 extending at right angles to the end portion 59, a further cross-part 61 and an end portion 62. The cross-part 61 allows relative transverse movement of the end portion 62 and the arm 58. The end portion 62 is connected to the link rod 63 via a ball joint and the link rod 63 is in turn pivotally connected to one end of the shaft 64. The other end of the shaft 64 is fixedly connected to the arm 49 fixed to the transverse door, the shaft passing through a part of the fixed mounting 53 and being rotatably mounted therein to define the rotatable connection 52. Thus, rotational movement of the first door 1 causes rotation of the crank arm 58 which in turn via the link rod 63 causes rotation of the shaft 64 and, with it, the arm 49 and the transverse door 3. The amount of movement of the door 3 for a given movement of the door 1 is determined by the geometry of the linkage.

The movement of the door 1 is driven by a linear actuator, typically a hydraulic actuator, via a simple linkage. For the sake of clarity the drive arrangement is shown only in Figs. 1A and 2A and is shown in dotted outline. A hydraulic actuator 69 with a piston 70 is pivotally connected at an upper end to the aircraft structure (not



shown) and the distal end of the piston 70 is pivotally connected to a rod 71 fixed to the portion 35 of the central arm 32 of the door 1. Thus extending the actuator causes the door 1 to open and retraction of the actuator causes the door 1 to close.

It should be understood that the illustrated linkages for causing movement of the doors and synchronizing those movements are shown in a schematic form and serve to illustrate the principles involved rather than to show details of the mechanisms. Such linkages are well known *per se*.

Thus it can be seen that in the embodiment just described the three doors each rotate about fixed axes under the control of a single prime mover and with their individual movements being synchronized by a linkage connecting the movement of the first door to the movement of the second door and another linkage connecting the movement of the first door to the movement of the third door.

Whilst in the embodiment of the invention described above the only doors that rotate about horizontal axes are on the same side of the aperture through which the landing gear is deployed, it will be understood that it is also possible to provide further doors on the opposite side of the aperture as a mirror image of the doors described above. In that case of course the size of the aperture is doubled. A further possibility is to provide a single transverse door common to the doors on opposite sides of the aperture. Fig. 5 shows such an arrangement, when closed, as a diagrammatic plan view. The arrangement comprises a first door 1, a second door 2, a third door 1a which together with the door 1 provides a pair of doors, a fourth door 2a which opens to allow passage of the door 1a in a manner similar to that in which the door 2 opens to allow passage of the door 1, and finally a transverse door 3a which functions in a manner similar to the transverse door 3 described above.

Claims:

1. An aircraft landing gear door assembly including a plurality of doors moveable between open positions, in which landing gear can be deployed through an aperture, and closed positions, in which the doors are closed across the aperture, the plurality  
5 of doors including a first door mounted for rotational movement between closed and open positions about a first generally longitudinal axis and a transverse door mounted for rotational movement between closed and open positions about a generally horizontal axis that is transverse to the first generally longitudinal axis.
2. An assembly according to claim 1, in which the first door is mounted for fixed-  
10 axis rotational movement about the first generally longitudinal axis.
3. An assembly according to claim 1 or 2, in which the transverse door is mounted for fixed-axis rotational movement about the transverse generally horizontal axis.
4. An assembly according to any preceding claim, further including a linkage  
15 mechanism and a prime mover, the linkage mechanism connecting the plurality of doors to the prime mover such that the prime mover is effective to operate all the plurality of doors.
5. An assembly according to claim 4, in which the prime mover comprises a linear actuator, one stroke of the actuator in one direction being effective to move the  
20 doors from the closed positions to the open positions and one stroke of the actuator in the opposite direction being effective to move the doors from the open positions to the closed positions.
6. An assembly according to any preceding claim in which the transverse door is disposed at least mostly above the aperture in its open position.

7. An assembly according to any preceding claim, in which the transverse door is aft of the first door.

8. An assembly according to any preceding claim, in which the plurality of doors include a second door moveable between closed and open positions, the second door being adjacent to the first door in the closed positions of the doors, the first door being so mounted that its rotational movement from its closed position to its open position involves movement of at least part of the first door through space which is occupied by the second door in its closed position and vacated by the second door in its open position.

9. An assembly according to claim 8, in which the second door is mounted for fixed-axis rotational movement about a second generally longitudinal axis.

10. An assembly according to claim 8 or 9, in which the first generally longitudinal axis is disposed at a location vertically spaced above the level of the aperture.

11. An assembly according to claim 10, in which the first generally longitudinal axis is disposed in a region overlying the locations of adjacent edges of the first and second doors when they are closed.

12. An assembly according to any preceding claim, in which the plurality of doors include a third door mounted for rotational movement between closed and open positions about a third generally longitudinal axis, the first and third doors defining a pair of doors on opposite sides of the aperture.

13. An assembly according to claim 12, in which the plurality of doors include a fourth door moveable between closed and open positions, the fourth door being adjacent to the third door in the closed positions of the doors, the third door being so mounted that its rotational movement from its closed position to its open position

involves movement of at least part of the first door through space which is occupied by the fourth door in its closed position and vacated by the fourth door in its open position.

14. As assembly according to claim 13, in which the third door is mounted for  
5 fixed-axis rotational movement about a third generally longitudinal axis.

15. An assembly according to claim 13 or 14, in which the third generally longitudinal axis is disposed at a location vertically spaced above the level of the aperture.

16. An assembly according to claim 15, in which the third generally longitudinal  
10 axis is disposed in a region overlying the locations of adjacent edges of the third and fourth doors when they are closed.

17. An assembly according to any of claims 13 to 16, in which the fourth door is mounted for fixed-axis rotational movement about a fourth generally longitudinal axis.

18. An aircraft landing gear door assembly substantially as herein described.

15 19. An aircraft including a landing gear door assembly according to any preceding claim.

20. An aircraft according to claim 19, including a further landing gear which when deployed is adjacent to one end of the first door when in its open position, the transverse door being disposed adjacent to said one end of the first door when the  
20 doors are in their closed position.

## ABSTRACT



### Landing Gear Door Assembly

5

An aircraft landing gear door assembly has a plurality of doors. The doors include a first door (1) mounted for rotational movement between closed and open positions about a first generally longitudinal axis (11) and a transverse door (3) mounted for rotational movement between closed and open positions about a generally horizontal  
10 axis (13) that is transverse to the longitudinal axis (11). The provision of the transverse door (3) can allow the length of the first door (1) to be reduced from that which would otherwise be required to allow passage of the landing gear.

15 Fig. 1B to accompany the abstract on publication.

1/10

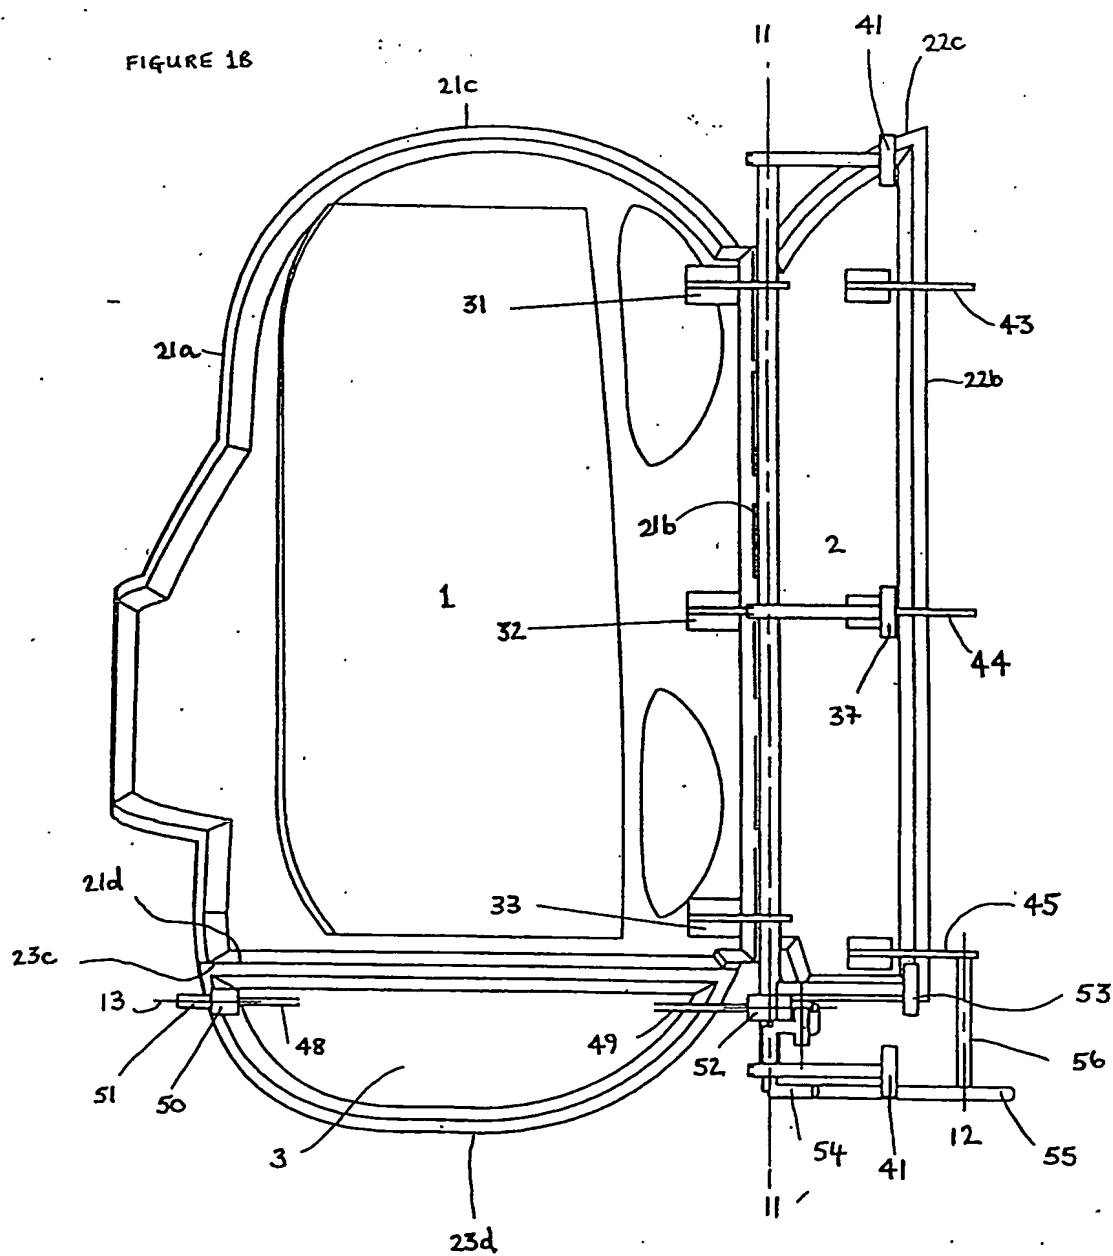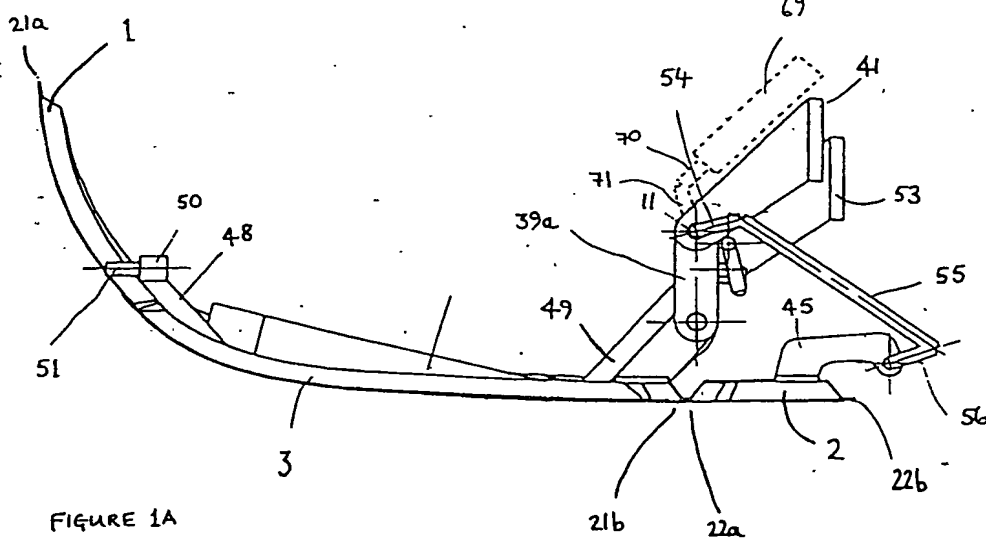

2/10


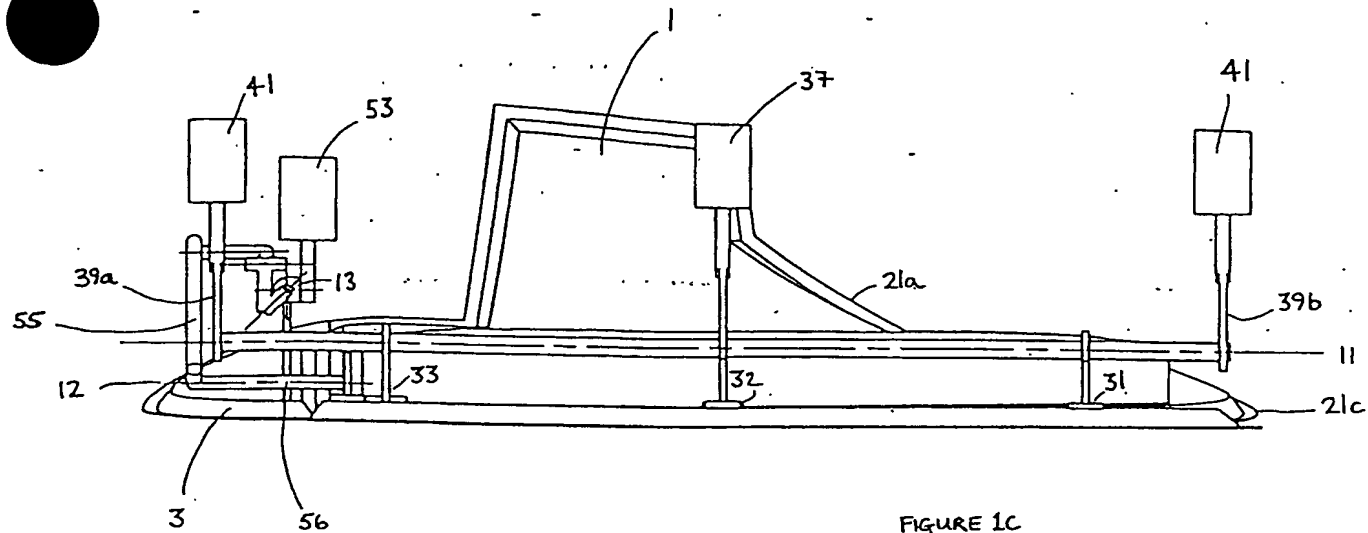


FIGURE 1C

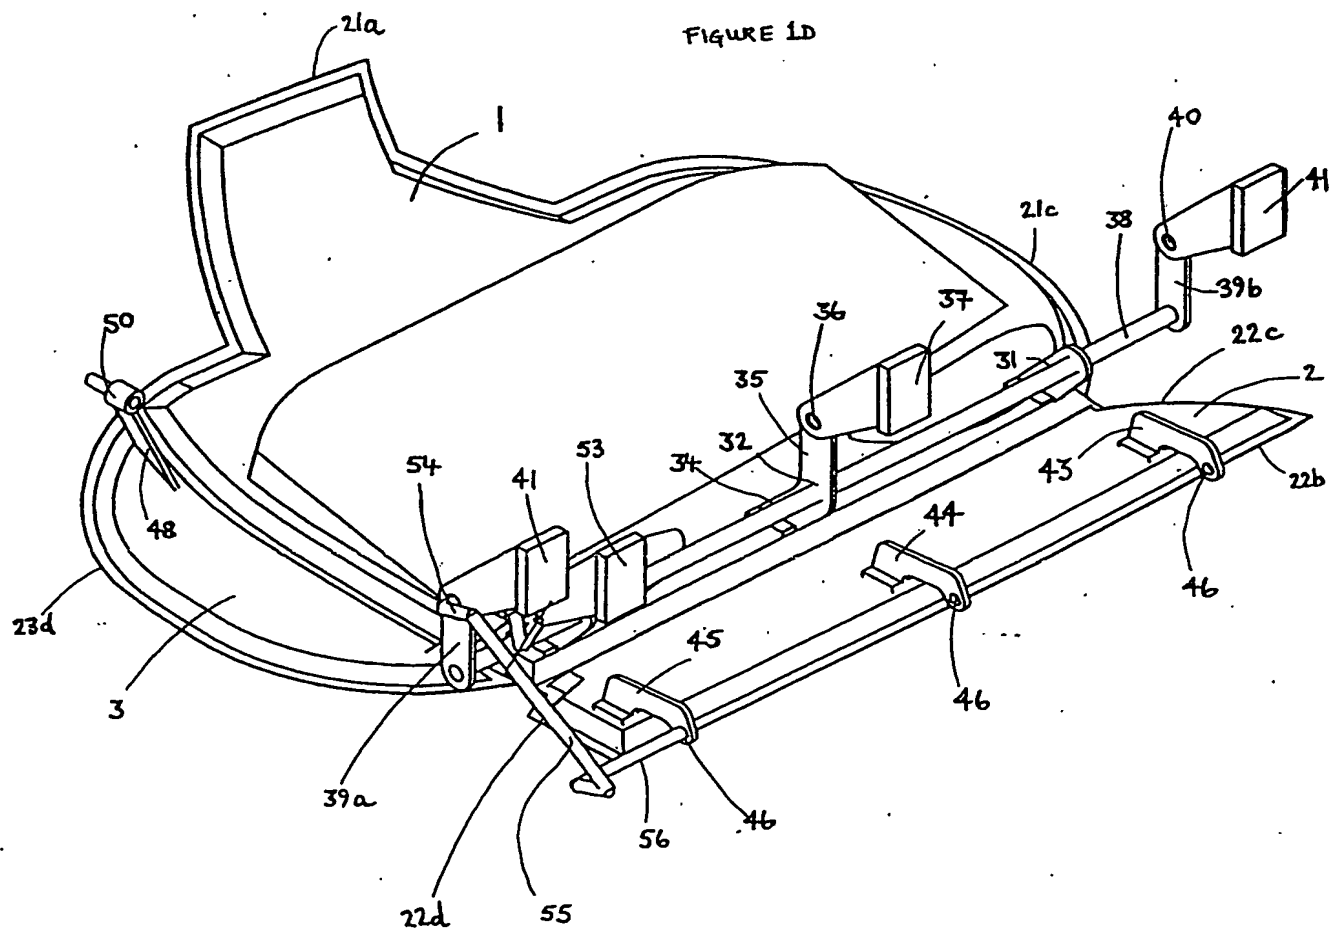

3/10

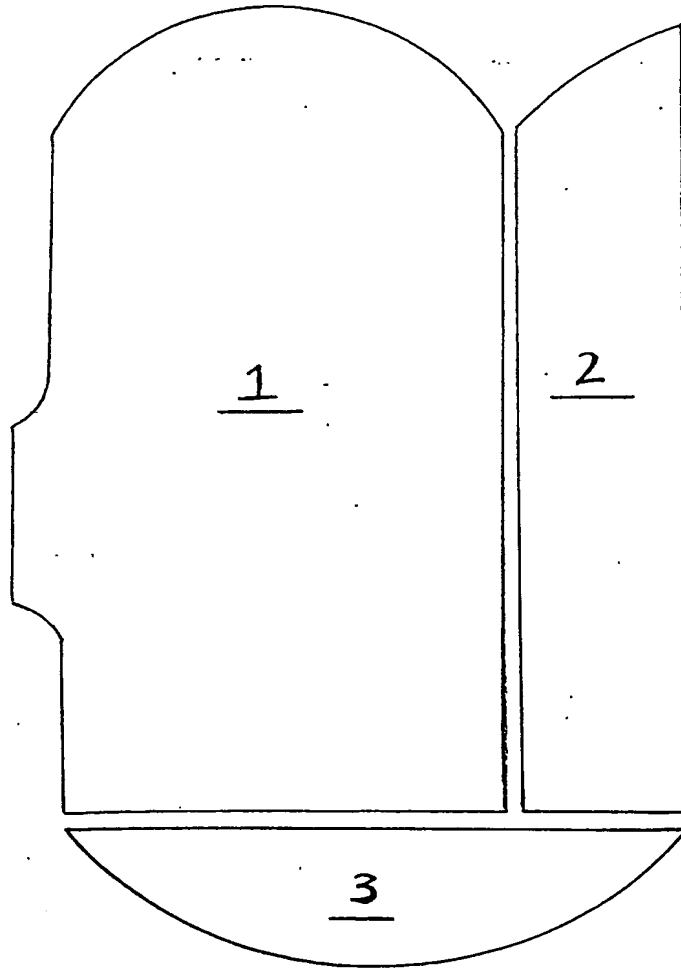


FIGURE 1E



4/10

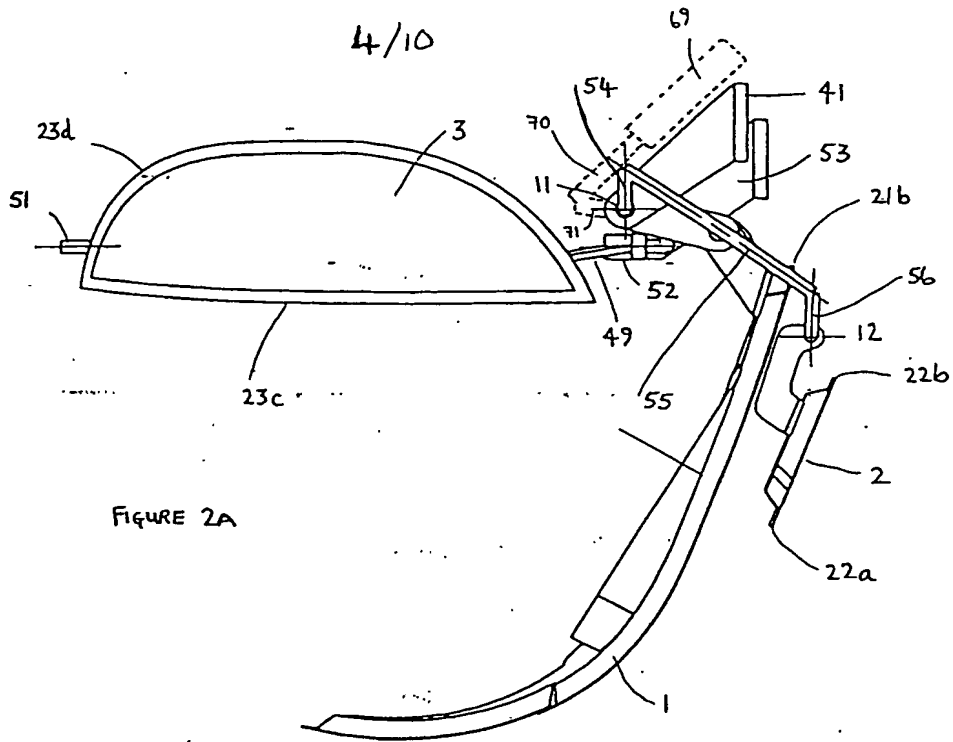


FIGURE 2A

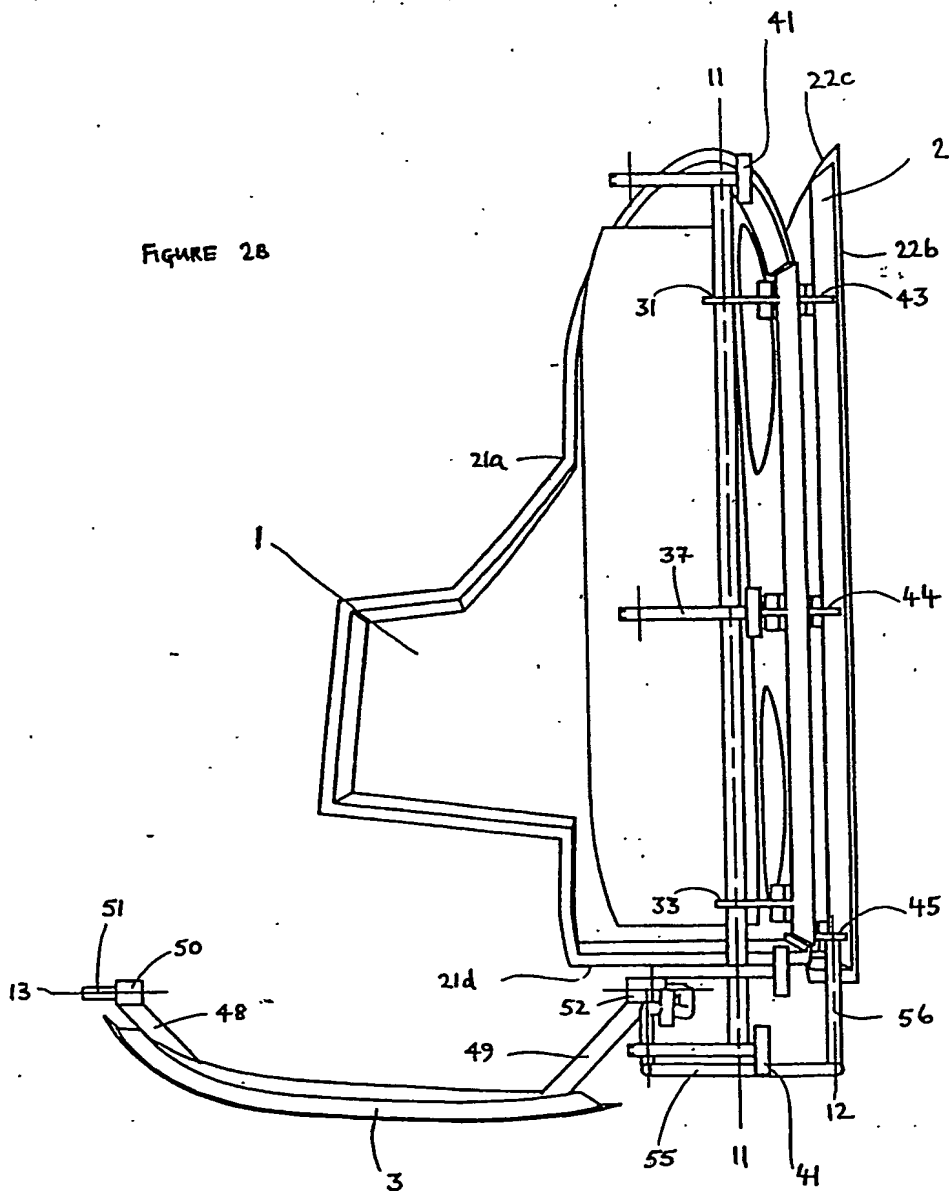


FIGURE 2B

S/10

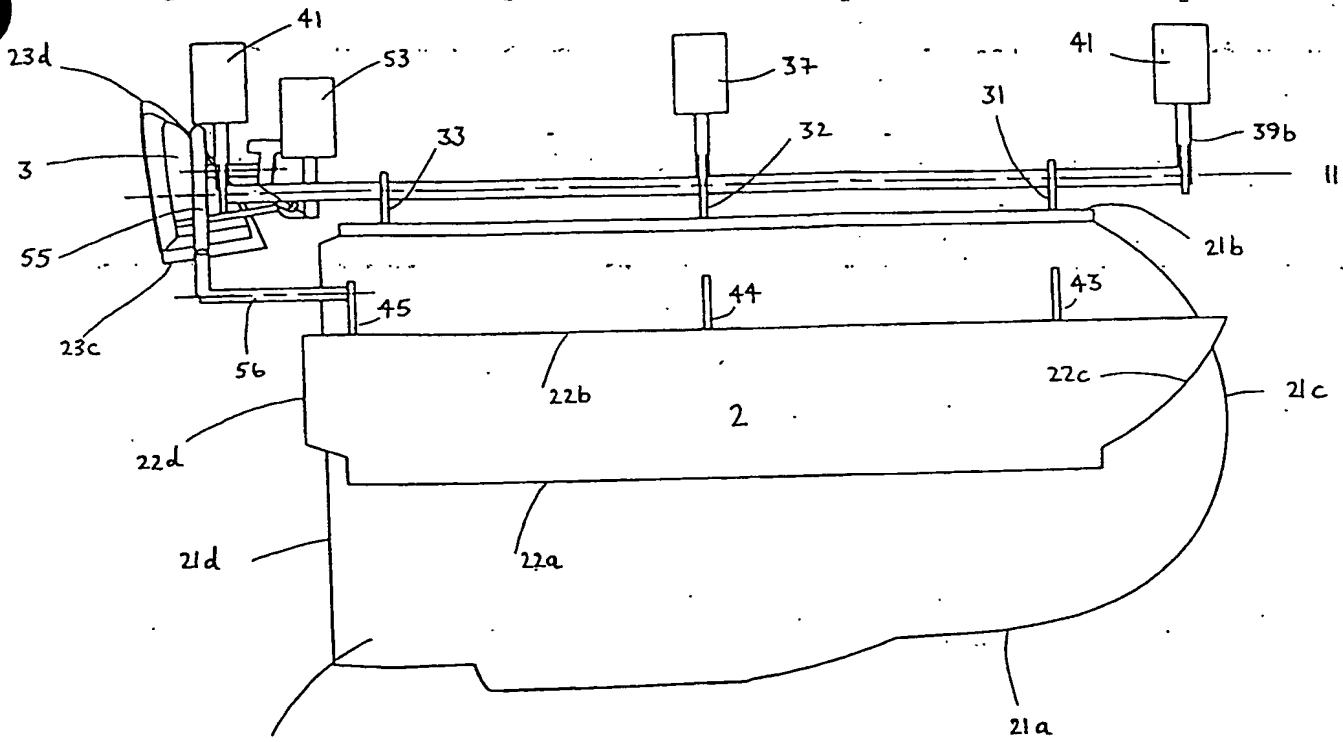


FIGURE 2c

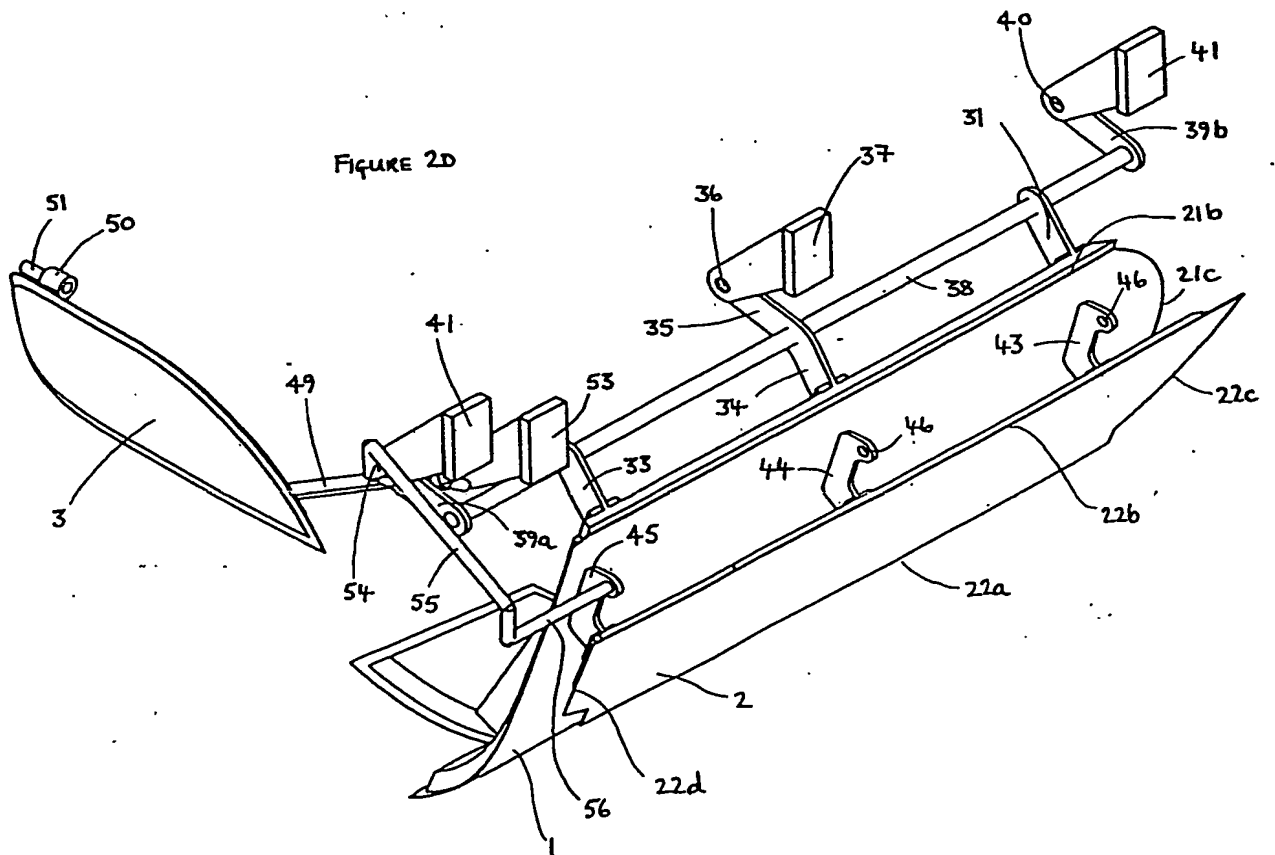


FIGURE 2D

FIGURE 3A

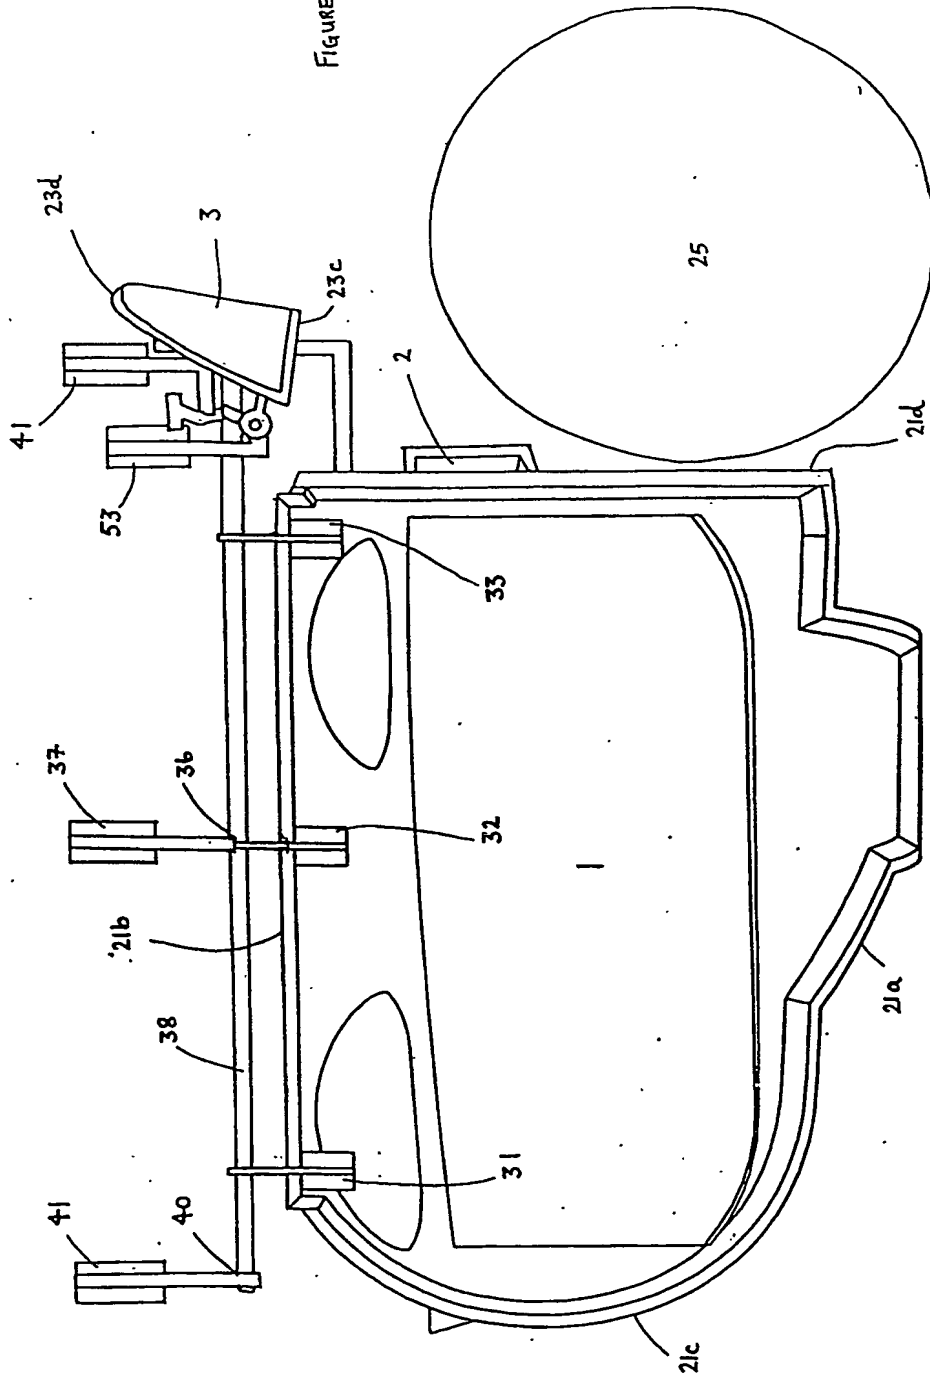


FIGURE 3B

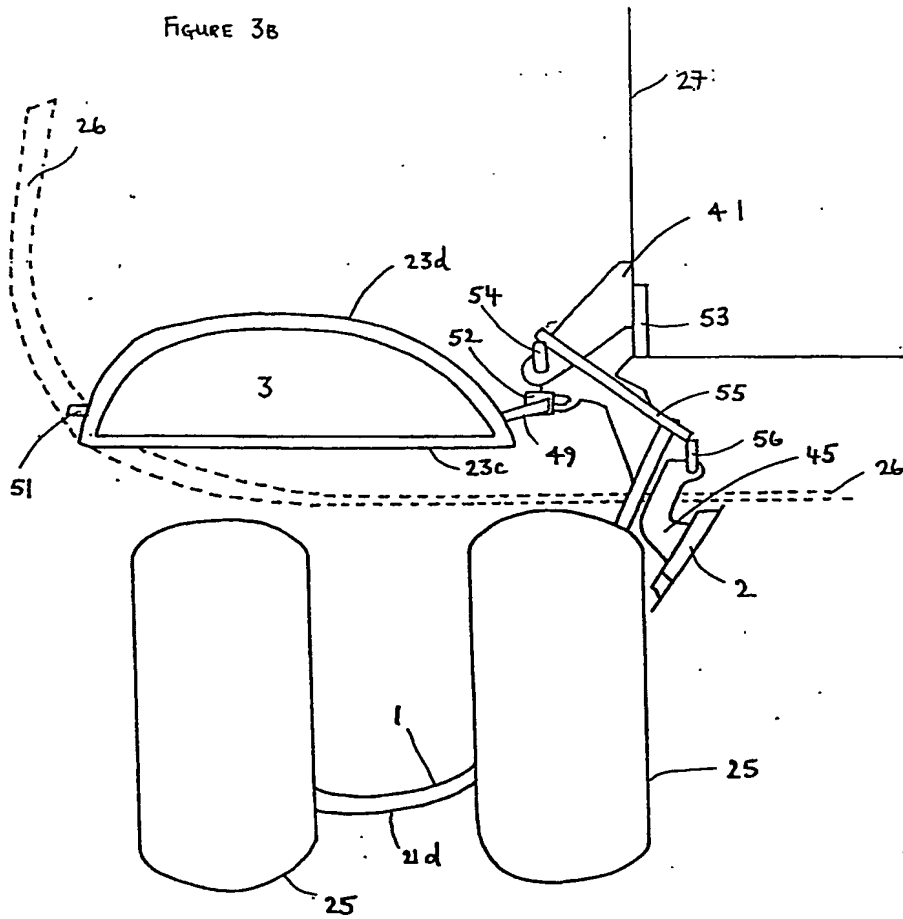
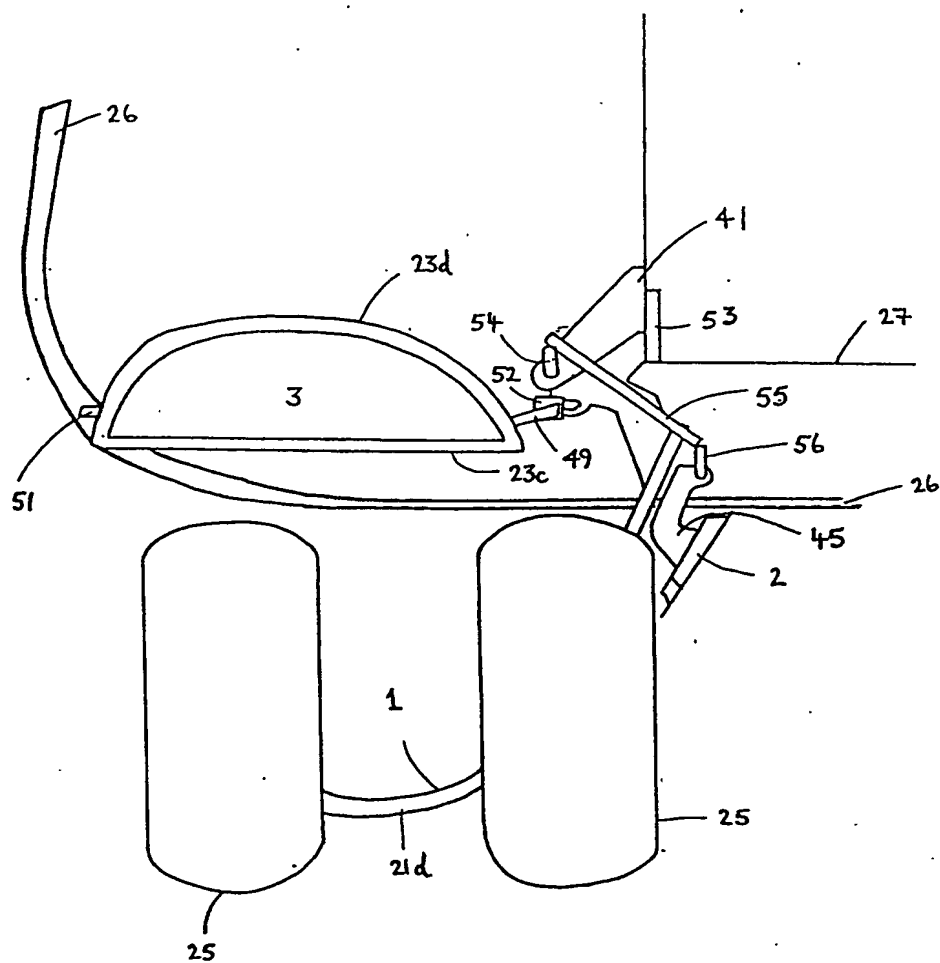


FIGURE 3B



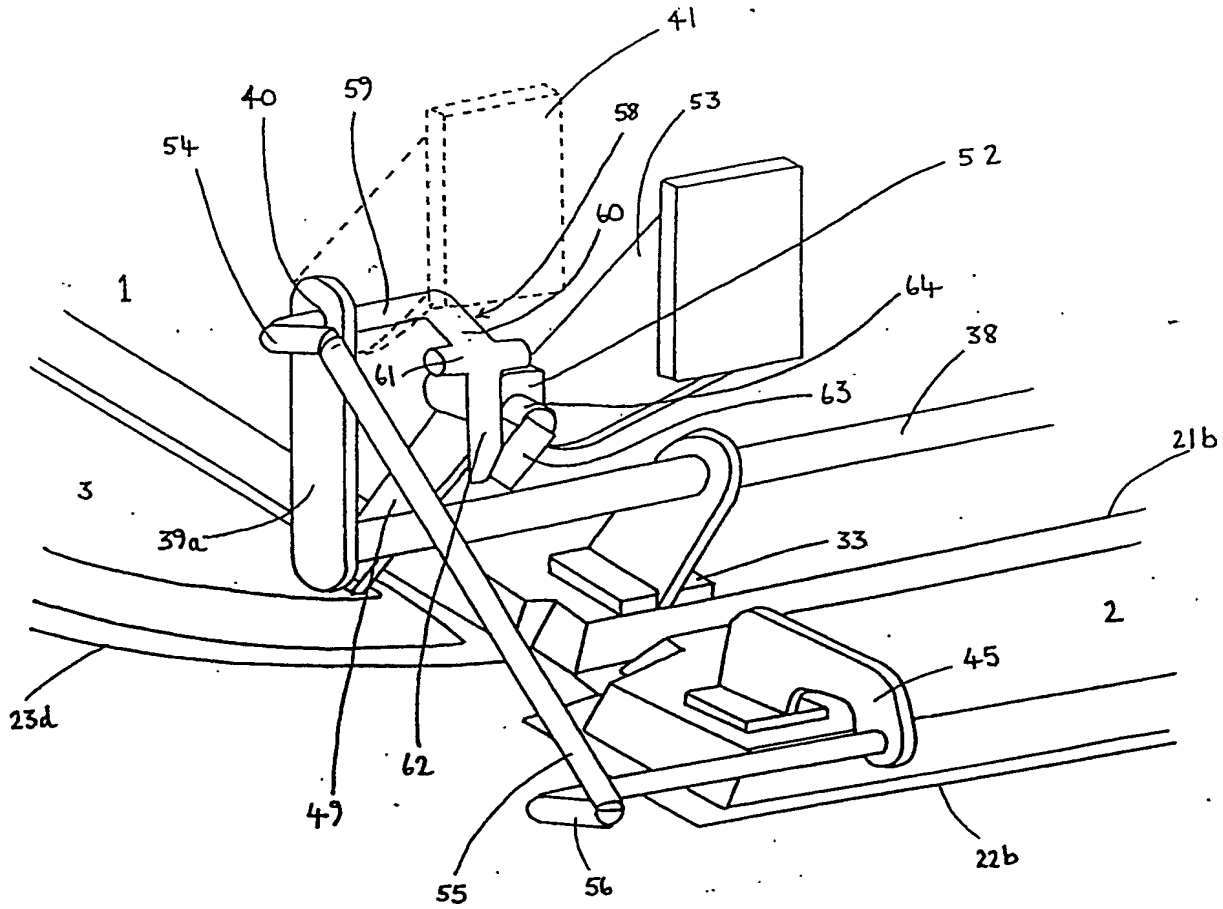


FIGURE 4

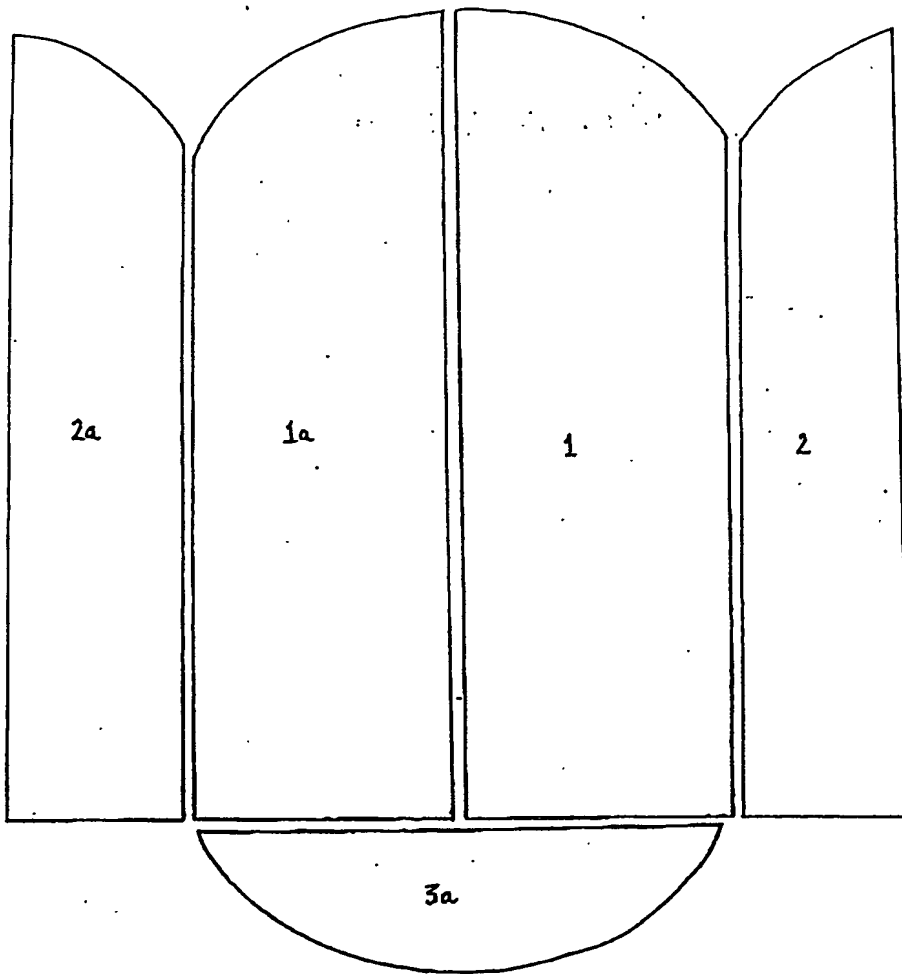


FIGURE 5

PCT / 218 2003 / 00 1387

THE PATENT OFFICE

U.S. APR 2003

Received in Patents  
International Unit



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**